# **PCT**

# WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



#### INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT

(51) International Patent Classification 6:	1	(11) International Publication Number: WO 98/21838
H04B 7/185	A1	(43) International Publication Date: 22 May 1998 (22.05.98
<ul> <li>(21) International Application Number: PCT/EP96</li> <li>(22) International Filing Date: 11 November 1996 (1)</li> <li>(71) Applicant (for all designated States except US): TELECOMMUNICATIONS OY [FI/FI]; Upseering FIN-02600 Espoo (FI).</li> <li>(72) Inventor; and</li> <li>(75) Inventor/Applicant (for US only): SINIVAARA, Hassetian [FI/FI]; Tahkorinne 19 A 1, FIN-02760 Espoo</li> <li>(74) Agents: PALMER, Roger et al.; Page White &amp; Fame Doughty Street, London WC1N 2LS (GB).</li> </ul>	NOKI NOKI nkatu se, Kris (FI).	BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG)  Published
(54) Title: AERONAUTICAL CELLULAR NETWORK  (57) Abstract  A cellular telephone system for use in an aircraft comprises a plurality of user terminals distributed throughout seating array, each group of terminals being connected through an optical fibre array (50) to a further transducer connected by short cables (27, 28) to a Base Transceiver States.	t the ough nked (26)	SEAT ARRAY  SEAT ARRAY  ARRAY

### FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GB	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL.	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of Americ
CA	Canada	ΙT	Italy	MX	Mexico	UZ	Uzbekistan
CF '	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KB	Кепуа	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

#### AERONAUTICAL CELLULAR NETWORK

The invention relates to an aeronautical cellular network and includes a cellular telephone system for use within an aircraft.

The invention is particularly applicable to the use of cellular telephone systems such as GSM or DCS cellular systems. It is well known that mobile telephones using such systems may not be used in aircraft due to the possibility of interference with aircraft equipment. Any transmitted radio frequency power level within an aircraft must be very low to avoid interference and any extended length of radio frequency cables is also liable to cause interference. The distribution of seat positions within an aircraft makes it impossible to have equal signal distribution from a plurality of user locations within the aircraft to a common Base Transceiver Station (BTS) which may form part of the communication path to the exterior of the aircraft.

An object of the present invention is to provide an improved telephone system for use within an aircraft which avoids unwanted interference.

The present invention provides a cellular telephone system for use within an aircraft which comprises a plurality of user terminals distributed within an aircraft for location each adjacent a seat or a group of seats, an optical interface system distributed throughout the aircraft and comprising a plurality of optical fibres, interconnecting an array of transducer units with a master unit, each transducer unit and said master unit providing a bidirectional communication path with conversion between optical and radio signals, each transducer unit being located near and connected to a user terminal or group of user terminals by respective cable connections, said master unit being connected to a Base Transceiver Station (BTS) within the aircraft, said base Transceiver Station being connected to an Aeronautical Earth Station (AES) for transmitting and receiving

signals via satellite to a Ground Earth Station.

Preferably each transducer unit is connected to a plurality of user terminals through one or more power splitting devices to provide equal signal strength to each user terminal connected to the transducer unit.

Preferably the optical interface system provides a plurality of uplink and downlink communication paths between the user terminals and the master unit whereby a plurality of users may communicate simultaneously through the Base Transceiver Station.

The invention also provides a method of operating a cellular telephone system within an aircraft, which method comprises establishing a radio frequency connection through a cable connection from a user terminal in the aircraft to a transducer located close to the user terminal, effecting bidirectional conversion between radio frequency signals and optical signals in said transducer, providing an optical signal through an optical fibre network distributed throughout the aircraft and providing a connection between a master unit and a plurality of said transducers, effecting bidirectional conversion between radio frequency signals and optical signals in said master unit, and providing a screened radio frequency cable connection between said master unit and a Base Transceiver Station for use in input and output of telephone messages.

An embodiment of the invention will now be described by way of example and with reference to the accompanying drawings in which:

Figure 1 is a schematic view of a telephone communication system between users in an aircraft and an earth system,

Figure 2 shows schematically a view of the telephone communication paths within the aircraft in accordance with the invention,

WO 98/21838 PCT/EP96/04912

3

Figure 3 shows a more detailed view of the system of Figure 2, and

Figure 4 shows further details of the system of Figure 3.

The telephone system of this example enables subscribers to a cellular mobile telephone system to use telephones within an aircraft without causing interference with the aircraft systems. The system is particularly applicable to subscribers to a known GSM/DCS network in which the user has a SIM card which the user may locate in a receptor in a phone to use the services available to him. The system may however be used with any available cellular system.

In the general scheme shown in Figure 1, a plurality of users within an aircraft 12 are able to transmit or receive telephone messages through an Aeronautical Earth Station (AES) located within the aircraft 12 which communicates through a satellite 14 to a Ground Earth Station 16 using Abis links 13 and 15 to and The Ground Earth Station 16 communicates from the satellite. through a satellite communication Base Station Controller (BSC) 17 to a Mobile Switching Centre (MSC) 18 linked to a Public Service Telephone Network (PSTN) 19. The operation of the Base Station Controller 17, Mobile Switching Centre 18 and Public Service Telephone Network 19 are conventional in established cellular telephone networks. In this case however the BSC 17 is dedicated to a specific group of Base Transceiver Stations (BTS) in a plurality of aircraft so that those BTS are always controlled by the same BSC 17.

To avoid interference within the aircraft an optical interface system is used as shown in Figures 2, 3 and 4. The input and output of telephone messages to and from the aircraft are handled by an Aeronautical Earth Station 20 connected through an Abis link 21 to a Base Transceiver Station 22 each operating in known manner for a GSM Cellular Telephone System. However, to avoid interference with radio frequency signals between user telephones

and the Base Transceiver Station 22, an Optical Interface System 25 is distributed throughout the aircraft. The Optical Interface System comprises a plurality of optical fibres providing uplink and downlink connections between the Base Transceiver Station 22 and a plurality of phones, such as mobile cellular phones, distributed at each seat or group of seat positions around the aircraft. One end of the optical fibre system is connected to a master unit 26 which converts optical signals to radio frequency signals in both directions so as to allow bidirectional communication through the system. The master unit 26 connected to the Base Transceiver Station 22 by an uplink cable 27 and a downlink cable 28 each comprising a coaxial cable screened to provide interference-free communication over the short length between the master unit 26 and the Base Transceiver Station 22. The long communication paths throughout the aircraft to each of the users are provided by the optical cables within the optical interface system 25. The optical fibres are connected to a plurality of transducer units 30 located at a plurality of spaced locations around the aircraft. transducer unit 30 is located in the vicinity of a group of seats. In this particular example shown in Figure 3 and Figure 4 each transducer unit services three rows of seats each row comprising 10 seats. Each transducer 30 which forms a remote unit (RU) is connected through screened coaxial cables to a plurality of user terminals which in this example are provided at each seat location in the aircraft. To provide equal signal distribution to each location, each transducer unit 30 is connected through a series of power splitters to the respective user terminals. In the arrangement shown in Figure 4, each transducer 30 is connected through a first power splitter 32 to provide three respective equal power outputs to row 1, row 2 and row 3 of seats which are connected to that transducer. Figure 4 shows more detail of the connections made to row 1. case the output from power splitter 32 is passed through a second power splitter 33 in order to provide feeder cable connections 34,35 and 36 to respective groups of seats in a common row. Cable 34 passes through a further power splitter 37 to provide

three separate equal power connections to the three seats forming a group of seats 39. Similarly cable 35 is connected to a power splitter 40 which provides four equal power connections to the four seats forming a further group of seats 42. Cable 36 is connected through a power splitter 43 to provide three equal power connections to the three seats forming a further group 44. Each of the power splitters described is arranged so that each seat location which provides a user terminal, has a similar power connection to the associated transducer 30. The transducers and power splitters are arranged so that all user terminals throughout the aircraft experience similar power connections to the system.

In this particular example each user terminal comprises a cellular phone of conventional construction located at each seat location and wire connected to the associated transducer 30. Each of these phones has a receptor for a SIM card which can be inserted by the user when he wishes to use the telephone service so that he is identified by his own telephone number indicated on the SIM card and the cost is billed to his own account.

The optical fibres 50 used in the interface system 25 are shown more fully in Figure 3 wherein each remote unit 30 is connected by respective optic fibre connections to the common master unit 26. The individual user terminals are indicated at 51 for a limited selection of user positions in Figure 2. They have been omitted for clarity in Figure 3.

In the examples shown in Figures 3 and 4, the master unit 26 is arranged to send a pilot signal, for example 10 MHz to each of the remote units 30 and from the remote units 30 back to the master unit 26 so that there is a continuous loop which detects the quality of the fibre optic links.

It will be appreciated that in this example, the communication system within the aircraft avoids electromagnetic interference with the aircraft system. Any radio frequency communication paths are of short extent common to all users within the aircraft. The communication paths which are long and of variable length depending upon the user's location are provided by the optical fibre interface.


The invention is not limited to the details of the foregoing example.


#### CLAIMS:

- 1. A cellular telephone system for use within an aircraft which comprises a plurality of user terminals distributed within an aircraft for location each adjacent a seat or a group of seats, an optical interface system distributed throughout the aircraft and comprising a plurality of optical fibres, interconnecting an array of transducer units with a master unit, each transducer unit and said master unit providing a bidirectional communication path with conversion between optical and radio signals, each transducer unit being located near and connected to a user terminal or group of user terminals by respective cable connections, said master unit being connected to a Base Transceiver Station (BTS) within the aircraft, said base Transceiver Station being connected to an Aeronautical Earth Station (AES) for transmitting and receiving signals via satellite to a Ground Earth Station.
- 2. A cellular telephone system according to claim 1 in which each transducer unit is connected to a plurality of user terminals through one or more power splitting devices to provide equal signal strength to each user terminal connected to the transducer unit.
- 3. A cellular telephone system according to any one of the preceding claims in which the optical interface system provides a plurality of uplink and downlink communication paths between the user terminals and the master unit whereby a plurality of users may communicate simultaneously through the Base Transceiver Station.
- 4. A cellular telephone system according to any one of the preceding claims in which said optical interface system provides a broad band communication path for a full GSM or DCS band of communication.


- 5. A cellular telephone system according to any one of the preceding claims in which an Abis link is provided by a cable connection between said Base Transceiver Station and said Aeronautical Earth Station.
- 6. A cellular phone system according to any one of the preceding claims in which each user terminal comprises a cellular phone unit.
- 7. A cellular telephone system according to claim 6 in which each user terminal comprises a cellular phone with a receptor for a subscription identifier for a user of the telephone network.
- 8. A cellular telephone system according to claim 7 in which the identifier is a SIM card.
- 9. A method of operating a cellular telephone system within an aircraft, which method comprises establishing a radio frequency connection through a cable connection from a user terminal in the aircraft to a transducer located close to the user terminal, effecting bidirectional conversion between radio frequency signals and optical signals in said transducer, providing an optical signal through an optical fibre network distributed throughout the aircraft and providing a connection between a master unit and a plurality of said transducers, effecting bidirectional conversion between radio frequency signals and optical signals in said master unit, and providing a screened radio frequency cable connection between said master unit and a Base Transceiver Station for use in input and output of telephone messages.
- 10. A method according to claim 9 in which optical signals are used to communicate between the master unit and a plurality of said transducers distributed around the aircraft and each transducer communicates with a plurality of user terminals with power splitting to provide equal power connections to each terminal.


11. A method according to claim 9 or claim 10 in which communication is effected through a cable between the said Base Transceiver Station and an Aeronautical Earth Station in the aircraft.

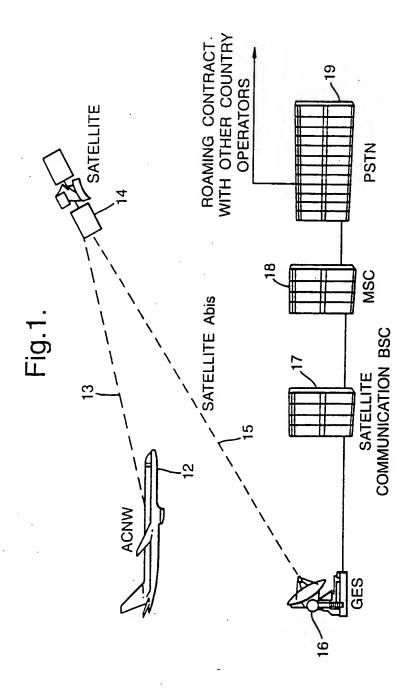

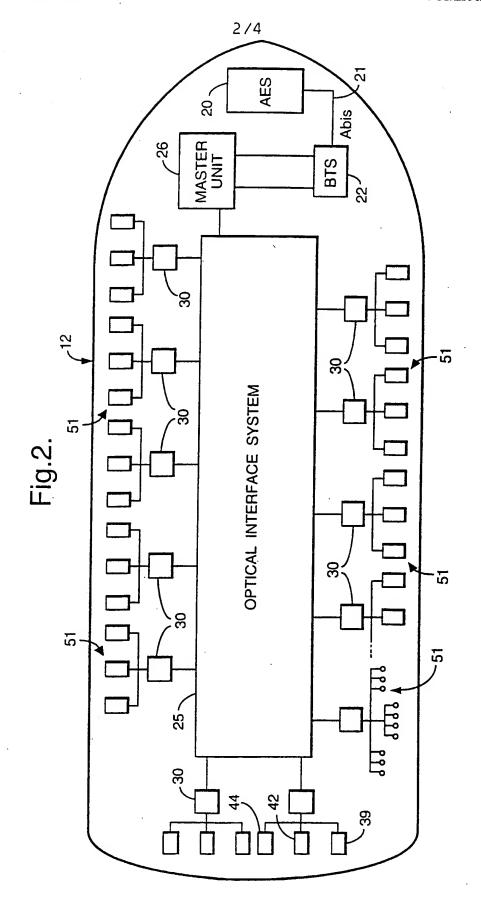

.

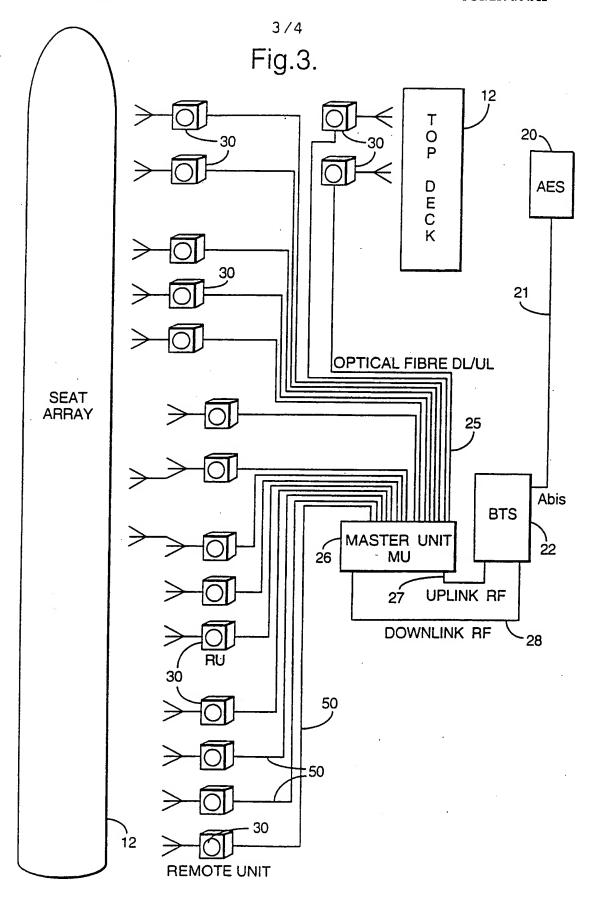

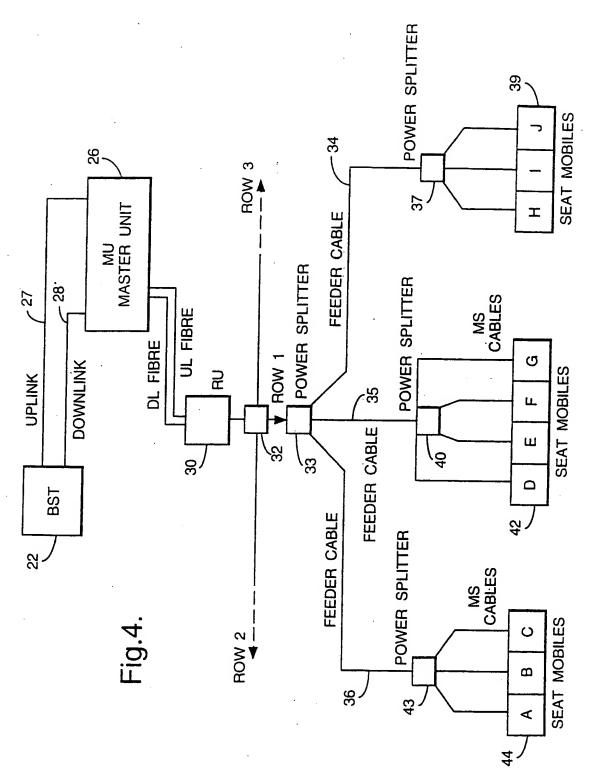

### INTERNATIONAL SEARCH REPORT

Internat Application No PCT/EP 96/04912

		P	CT/EP 96/04912
A. CLASSI IPC 6	FICATION OF SUBJECT MATTER H04B7/185		
	o International Patent Classification (IPC) or to both national classific	pation and IPC	
	SEARCHED		
IPC 6	ocumentation searched (classification system followed by classification H04B	on symbols)	
Documental	tion searched other than minimum documentation to the extent that e	such documents are included in	the fields searched
Electronio d	ata base consulted during the international search (name of data ba	se and, where practical, search	terms used)
C. DOCUME	ENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the rele	want passages	Relevant to claim No.
A	US 5 438 610 A (BHAGAT ET AL.) 1 1995	August	1-11
	see column 1, line 57 - column 2 claims 1-4; figures 1-8 		
A	WO 96 02094 A (QUALCOMM) 25 Janu see figures 1-4	1-11	
A	PETTIFOR J D ET AL: "AN OVERVIE AERONAUTICAL TELECOMMUNICATIONS AND WORLD-WIDE" BT TECHNOLOGY JOURNAL, vol. 14, no. 3, 1 July 1996, pages 64-73, XP000598156 see page 68, left-hand column, line 4	IN EUROPE	1-11
		·	
		-/	
س س	er documents are listed in the continuation of box C.	X Patent family member	ers are listed in annex.
*A* document consider *E* earlier do filing da *L* documen	egories of cited documents:  It defining the general state of the art which is not be of particular relevance ocument but published on or after the international stell the beautiful or the cited to establish the publication date of another	or priority date and not in oited to understand the p invention  "X" document of particular rel cannot be considered no involve an inventive step	wel or cannot be considered to when the document is taken alone
citation "O" documen	or other special reason (as specified) nt referring to an oral disclosure, use, exhibition or	document is combined w	involve an inventive step when the rith one or more other such docu-
other m "P" document later that	ears It published prior to the international filing date but un the priority date claimed	in the art.  *å* document member of the	n being obvious to a person ekilled same patent family
Date of the ac	ctual completion of the international search	Date of mailing of the inte	mational search report
	September 1997	- 9. 10. 97	
riame and mo	ailing address of the ISA  European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijwejk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-2040	Authorized officer Bischof, J	-L

## INTERNATIONAL SEARCH REPORT

Interna. J Application No
PCT/EP 96/04912

.(Continua	ntion) DOCUMENTS CONSIDERED TO BE RELEVANT	PCT/EP 96/04912
ategory *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	US 5 140 451 A (TALAT ET AL.) 18 August 1992 see claims 1-12; figures 1-3	1,9
	·	
		·

1

## INTERNATIONAL SEARCH REPORT

Information on patent family members

Interna. al Application No PCT/EP 96/04912

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5438610 A	01-08-95	US 5408515 A US 5278891 A US 5651050 A AU 3551089 A CA 1310699 A WO 8910626 A	18-04-95 11-01-94 22-07-97 24-11-89 24-11-92 02-11-89
WO 9602094 A	25-01-96	US 5559865 A AU 2967295 A	24-09-96 09-02-96
US 5140451 A	18-08-92	NONE	